

LOCTITE®



LOCTITE® 3D IND406™

HDT100 High Elongation
Photoplastic
Black

LOCTITE®

Henkel Corporation


loctite3dp@henkel.com





IND406™

HDT100 HIGH ELONGATION
PHOTOPLASTIC
BLACK

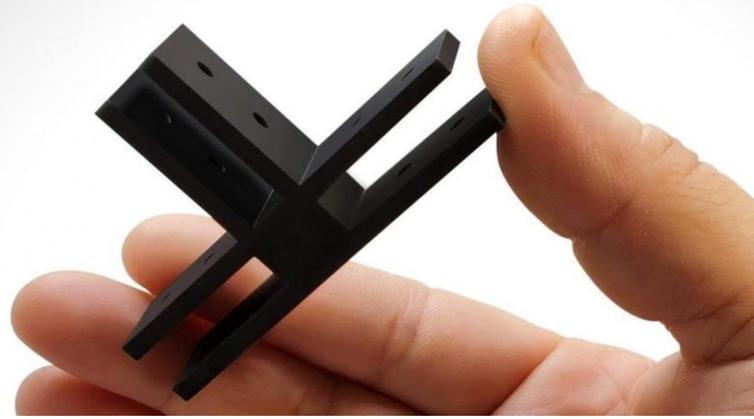

LOCTITE 3D IND406™

Our toughest High Temperature Resin

LOCTITE 3D IND406 is a high-strength, high elongation engineering plastic with good impact and high temperature resistance.

Stiffness, toughness and thermal durability make this material ideal for a wide variety of tools in the production floor and for final parts production in Automotive interior and manufacturing. The product is ideal for fixtures, interior and machinery parts.

LOCTITE 3D IND406 can be printed in various DLP printers and parts can be machined, tapped, or polished for final finish.



Benefits:

- High heat deflection temperature
- Tough and durable
- Good surface finish



Ideal for:

- Interior applications in automotive
- Tooling and fixtures
- Machinery components



Markets:




Industry



Automotive



Consumer
Goods

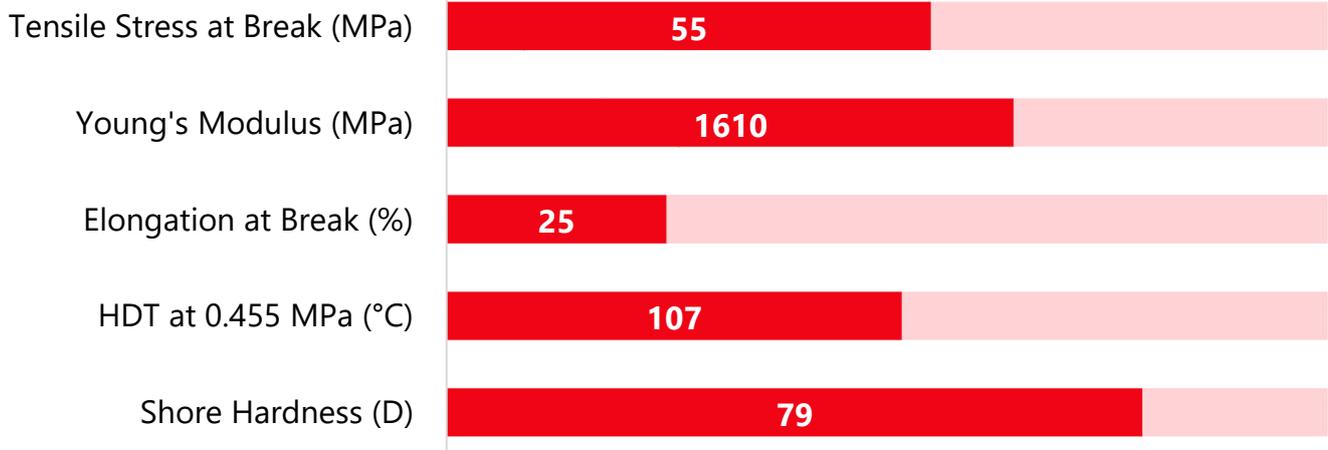


**Values shown are linked to LOCTITE IND406 Black as reference, please refer to the specific mechanical properties for each of the colors shown in this document*





IND406™

HDT100 HIGH ELONGATION
PHOTOPLASTIC
BLACK

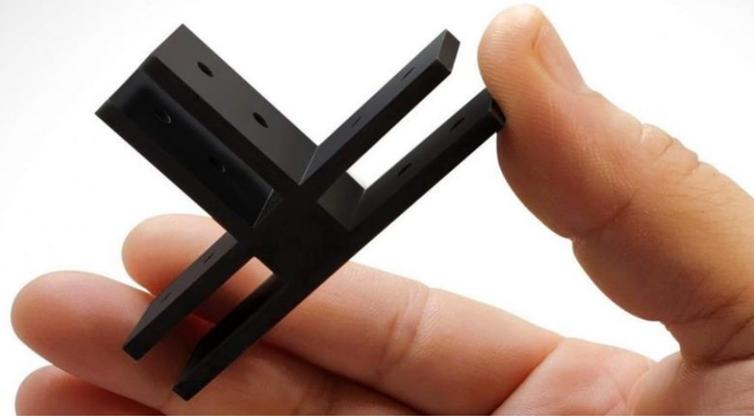

PROPERTIES

Mechanical Properties	Measure	Method	Green	Post Processed
Tensile Stress at Break	MPa	ASTM D638	17 ± 3 ^[1]	55 ± 1 ^[16]
Young's Modulus	MPa	ASTM D638	360 ± 50 ^[1]	1610 ± 40 ^[16]
Elongation at Break	%	ASTM D638	40 ± 6 ^[1]	25 ± 4 ^[2]
IZOD Impact (Notched)	J/m	ASTM D256	75 ± 4 ^[3]	35 ± 8 ^[4]
Shore Hardness	D	ASTM D2240	57 ± 1 ^[6]	79 ± 1 ^[7]
Flexural Modulus	MPa	ASTM D790	391 ± 28 ^[21]	1880 ± 25 ^[21]
Flexural Strain at Break	%	ASTM D790	>5 ^[21]	>5 ^[21]
Flexural Stress at Break	MPa	ASTM D790	-	-

Thermal Properties	Measure	Method	Green	Post Processed
HDT at 0.455 MPa	°C	ASTM D648	-	107 ± 1 ^[5,17]
HDT at 1.82 MPa	°C	ASTM D648	-	81 ± 2 ^[5,17]
Thermal Conductivity	mW/m·K	ASTM D5930	-	206 ± 3 ^[14]
Heat Capacity	J/(g·K)	ASTM D5930	-	1.46 ± 0.04 ^[14]
Horizontal flame spread speed (1.4 mm thickness)	mm/min	DIN 75200	-	28 (Pass) ^[15]

Test parameters:

*All specimen are printed unless otherwise noted. All specimen were conditioned in ambient lab conditions at 19-23°C / 40-60% RH for at least 24 hours." ASTM Methods: D638 Type IV, 5 mm/min; D256 Notched IZOD (Machine Notched), D648; D2240, Type "D" (0, 3 seconds); D570, 0.125" x 2" Disc, samples were dried at 50 °C for 24h; D7867 at 25°C (77°F), D790 at 13 mm/min
*The biological assessment has been performed based on the in vitro method according to ISO10993-23

Internal Data Sources:


[1] FOR34521, [2] FOR34437, [3] FOR20571, [4] FOR20572, [5] FOR33203, [6] FOR20367, [7] FOR20368, [8] FOR22529, [9] FOR22668, [10] FOR20806, [11] FOR25882, [12] FOR25880, [13] FOR25881, [14] FOR26105, [15] FOR30899, [16] FOR33166, [17] FOR33204, [18] FOR47937, [19] FOR27757, [20] FOR52821, [21] FOR235051





IND406™

HDT100 HIGH ELONGATION
PHOTOPLASTIC
BLACK

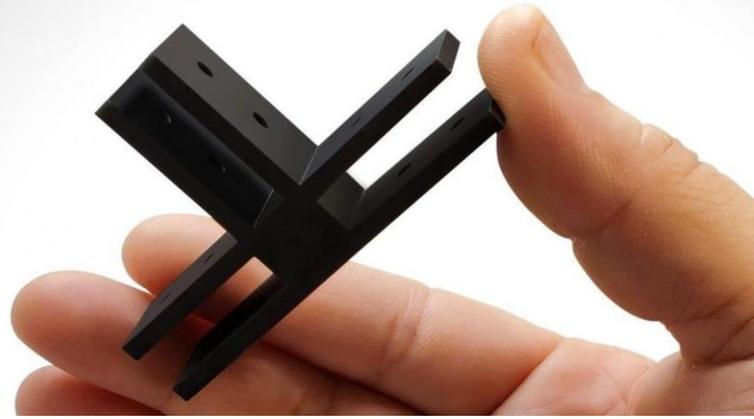

PROPERTIES

Electrical Properties	Measure	Method	Green	Post Processed
Dielectric Strength	kV/mm	ASTM D149	-	26.0 ± 0.3 [13]
Volume Resistance	Ω·cm	ASTM D257	-	4.5 ± 0.6 E+15 [12]
Surface Resistance	Ω	ASTM D257	-	1.1 ± 0.6 E+15 [12]
AC Relative Permittivity (Dielectric Constant) ^[11]				
at 50 Hz	none	ASTM D150	-	3.6
at 1 kHz	none	ASTM D150	-	3.4
at 1 MHz	none	ASTM D150	-	3.1
AC Loss Characteristics (Dissipation Factor) ^[11]				
at 50 Hz	none	ASTM D150	-	0.014
at 1 kHz	none	ASTM D150	-	0.019
at 1 MHz	none	ASTM D150	-	0.022

Other Properties	Measure	Method	Green	Post Processed
Viscosity at 25°C (77°F)	cP	ASTM D7867	-	1060 [10]
Water Absorption (24 h)	%	ASTM D570	-	1.4 [8]
Water Absorption (72 h)	%	ASTM D570	-	2.6 [9]
Solid Density	g/cm ³	ASTM D792	-	1.19 [18]
Liquid Density	g/cm ³	ISO 1675	-	1.10 [18]

Biocompatibility

Cytotoxicity		ISO10993-5		Comply ^[19]
Irritation		ISO10993-23*		Comply ^[20]

Test parameters:

All specimen are printed unless otherwise noted. All specimen were conditioned in ambient lab conditions at 19-23°C / 40-60% RH for at least 24 hours. ASTM Methods: D638 Type IV, 5 mm/min; D256 Notched IZOD (Machine Notched), D648; D2240, Type "D" (0, 3 seconds); D570, 0.125" x 2" Disc, samples were dried at 50 °C for 24h; D7867@ 25°C (77°F) D790 at 13 mm/min
*The biological assessment has been performed based on the in vitro method according to ISO10993-23


Internal Data Sources:

[1] FOR34521, [2] FOR34437, [3] FOR20571, [4] FOR20572, [5] FOR33203, [6] FOR20367, [7] FOR20368, [8] FOR22529, [9] FOR22668, [10] FOR20806, [11] FOR25882, [12] FOR25880, [13] FOR25881, [14] FOR26105, [15] FOR30899, [16] FOR33166, [17] FOR33204, [18] FOR47937, [19] FOR27757, [20] FOR52821, [21] FOR235051





IND406™
HDT100 HIGH ELONGATION
PHOTOPLASTIC
BLACK

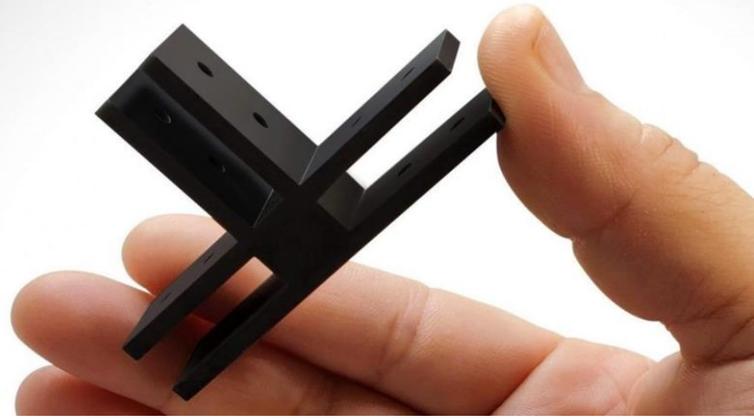

WORKFLOW

Validated workflows need to be followed to achieve properties as provided in the TDS. Examples of validated workflow steps are listed below. Users should defer to the most current workflow information for best results which can be found at <https://www.loctiteam.com/printer-validation-settings>

PRINTER SETTINGS

LOCTITE 3D IND406 BK is formulated to print optimally on industrial DLP printer. Read the safety data sheet carefully to get details about health and safety instructions. Recommended print parameters:

- Shake resin bottle well before usage
- Temperature: 20°C to 35°C
- Intensity: 3 mW/cm² to 7 mW/cm²

Exposure time for an intensity of 4-7 mW/cm²

Layer Thickness (µm):	100	E _c (mJ/cm ²)	6.45
First layer time (s)	40	D _p (mm):	0.28
Model Layer Cure Time (s):	6		

CLEANING


LOCTITE 3D IND406 BK requires post processing to achieve specified properties. Prior to post curing, support structures should be removed from the printed part, and the part should then be washed. Use compressed air to remove residual solvent from the surface of the material between intervals.

Post Process Step	Agent	Method	Duration	Intervals	Additional Info
Cleaning	IPA	Ultra sonic bath	3 min	1	Allow parts to dry between intervals
Dry	n.a.	Compressed air	10 to 60 s	1	Air pressure (50 psi)
Wait before post curing	n.a.	Ambient condition	60 min	1	Room temperature





IND406™
HDT100 HIGH ELONGATION
PHOTOPLASTIC
BLACK

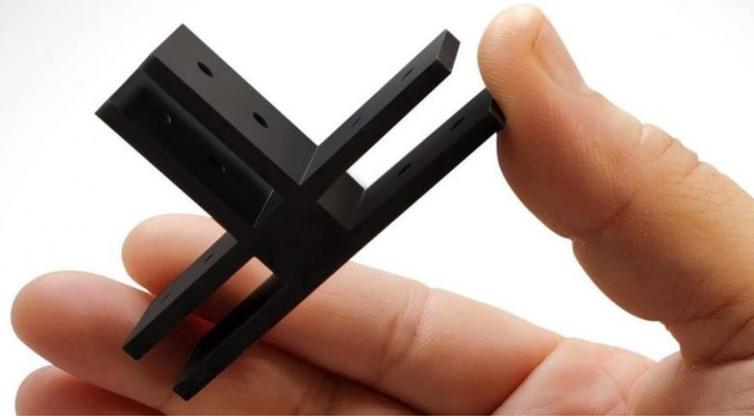

WORKFLOW

Validated workflows need to be followed to achieve properties as provided in the TDS. Examples of validated workflow steps are listed below. Users should defer to the most current workflow information for best results which can be found at <https://www.loctiteam.com/printer-validation-settings>

POST CURING

LOCTITE 3D IND406 BK requires post curing to achieve specified properties. It is recommended that a wide spectrum lamp is used to post cure parts.

UV Curing Unit	UV Source	Intensity	Cure time per side	Additional Settings (Shelf, Output Energy)
Loctite UVALOC 1000	Mercury Arc Bulb (broad spectrum)	30 mW/cm ² at 365 nm	10 min	500 W, lowest shelf

LOCTITE 3D IND406 BK requires a **thermal curing cycle** after UV post curing to achieve specified properties. It is recommended to place parts in an oven at 22°C. Place parts in cold oven and heat up oven at 2-3°C/min to cure parts for 2 hours at 140°C. Switch off oven heating and allow parts to cool down to room temperature afterwards.


STORAGE

Store **LOCTITE 3D IND406 BK** in the unopened container in a dry location. Optimal Storage: 8°C to 30°. Storage below 8°C or above 30°C can adversely affect product properties. Material removed from containers may be contaminated during use. For this reason, filter used resin with 190µm mesh filter before placing back into proper storage container.








IND406™
HDT100 HIGH ELONGATION
PHOTOPLASTIC
BLACK

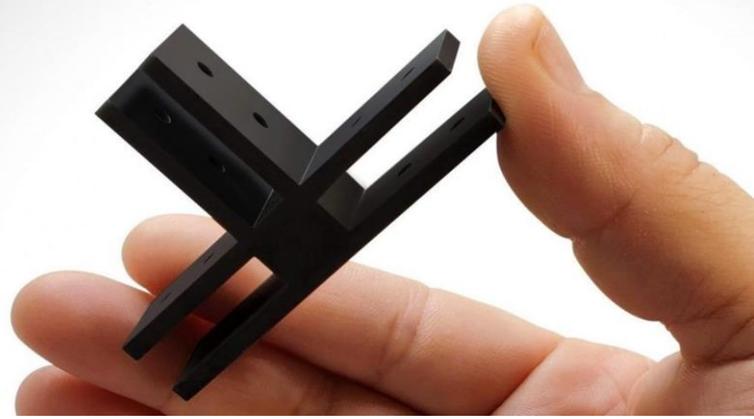

AGEING AND ENVIRONMENTAL EFFECTS – HEAT AGEING

LOCTITE 3D IND406 BK was heat aged without load according to ASTM D3045. Test samples were exposed for a defined time at 50°C and conditioned for 24 hours at 22°C before mechanical testing. Control samples were stored at a constant 22°C. All samples were printed in the same print job using a validated workflow. Mechanical testing was conducted according to ASTM D638 at standard lab conditions (22°C). "0 weeks" represents non-aged samples stored at 22°C and tested 24 hours after post-processing.

Based on temperature dependence of reaction rates a test time of 6 weeks at 50°C can be interpreted as approximately 12 months at ambient temperature.

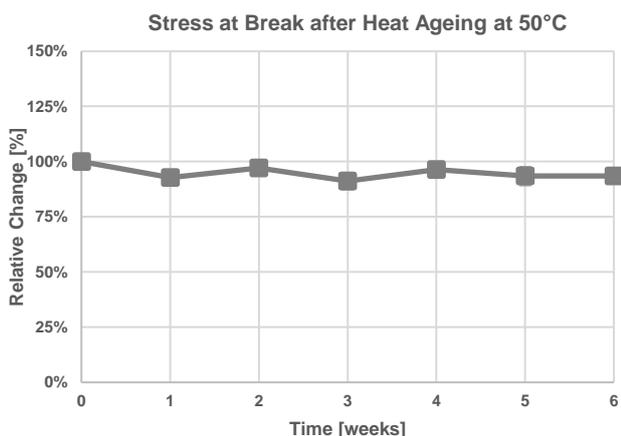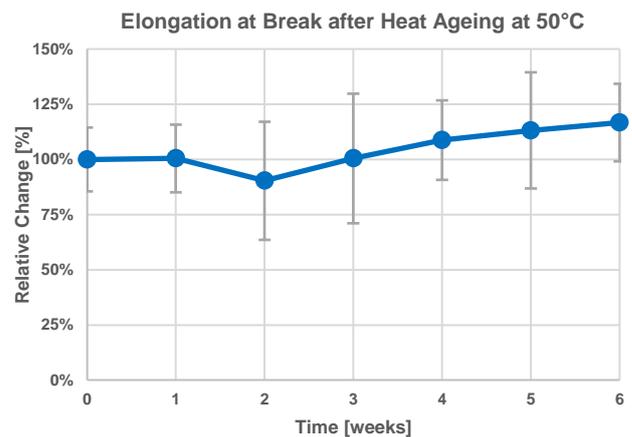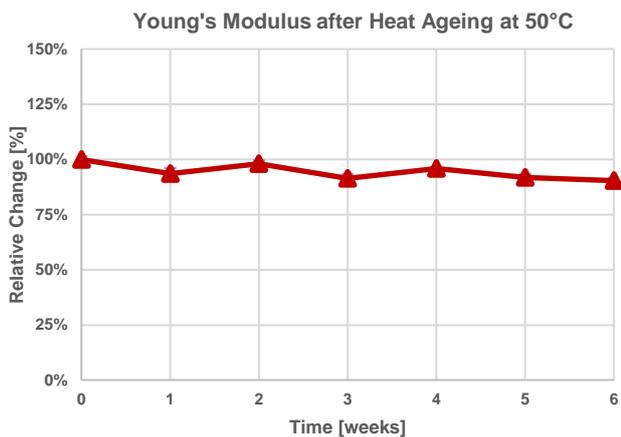

Test parameters:

ASTM D638: Type IV, Pull speed: 5 mm/min, Young's modulus measured at 0.1-1.0% (regression), 22°C


Internal Data Sources:
[FOR163707](#), [FOR163721](#)





IND406™

HDT100 HIGH ELONGATION
PHOTOPLASTIC
BLACK

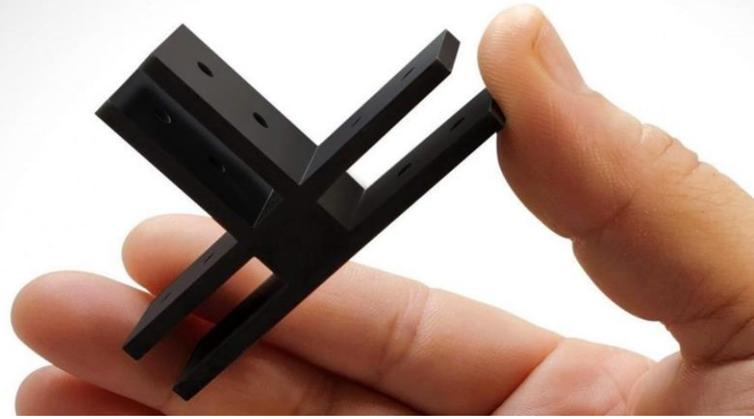


AGEING AND ENVIRONMENTAL EFFECTS – CLIMATE CYCLING TEST (PV1200)

LOCTITE 3D IND406 BK was tested in an environmental climate cycling test according to PV1200 specification. This specification was developed by Volkswagen AG to evaluate material durability and cycles between -40°C (4 hours) and 80°C (4 hours at 80 % rel. humidity) during a repeating 12-hour cycle. Test samples were exposed to this temperature cycle for a total duration of 7 weeks (100 cycles).


Before mechanical testing samples were conditioned for 24 hours at 22°C. Control samples were stored at a constant 22°C. All samples were printed in the same print job using a validated workflow. Mechanical testing was conducted according to ASTM D638 at standard lab conditions (22°C).

“0 weeks” represents non-aged samples stored at 22°C and tested 24 hours after post-processing.


Young's Modulus after PV1200

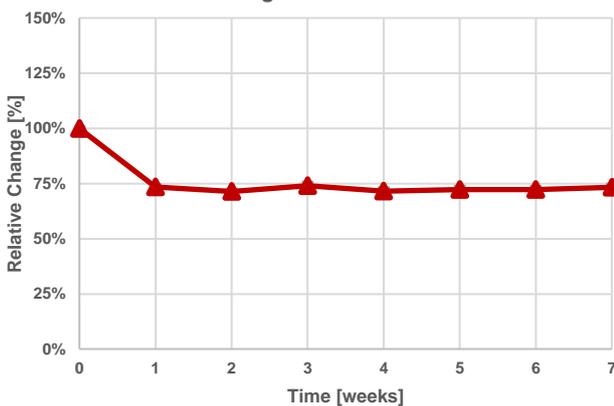

Elongation at Break after PV1200

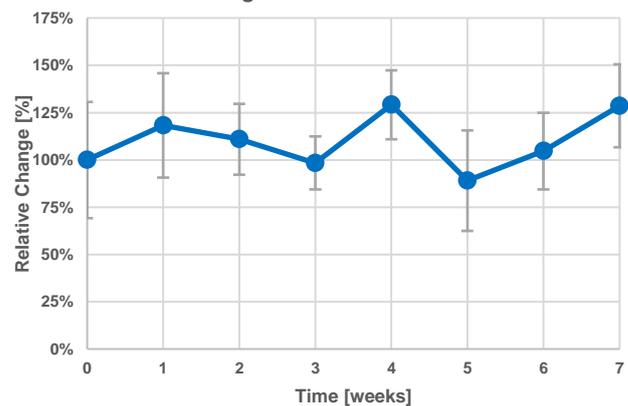

Stress at Break after PV1200

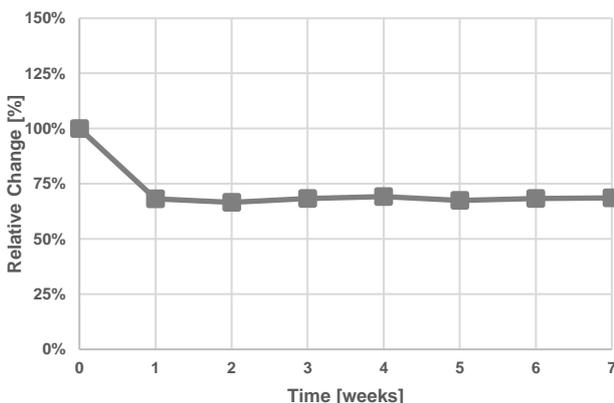

Test parameters:

ASTM D638: Type IV, Pull speed: 5 mm/min, Young's modulus measured at 0.1-1.0% (regression), 22°C

PV1200: Samples were removed from climate chamber during heating phase (Cycle time: 240-300 minutes) and then conditioned for 24 hours at 22°C. 1 Test cycle is equal to 12 hours of test time. "7 weeks" of test time represent 100 test cycles or 1200 hours of test time.


Internal Data Sources:
[FOR283110](#), [FOR283128](#)





IND406™


HDT100 HIGH ELONGATION
PHOTOPLASTIC
BLACK

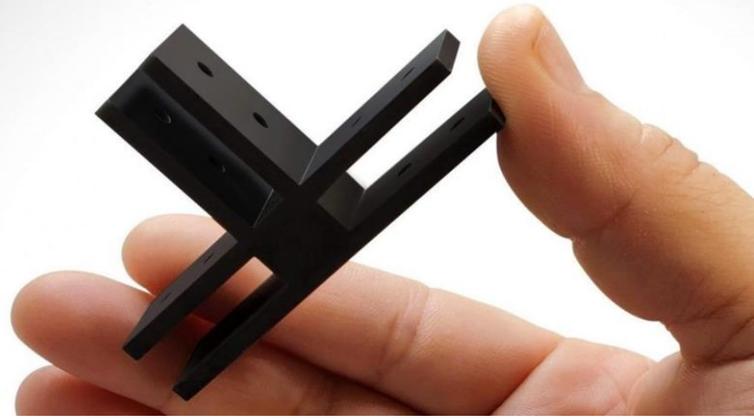


THERMAL INFLUENCE ON MECHANICAL PROPERTIES

LOCTITE 3D IND406 BK has been tested according to ASTM D638 at varied environmental temperatures, from -40°C to 100°C. All samples were printed in the same print job using a validated workflow. Mechanical testing was conducted according to ASTM D638. Before each test series samples were conditioned for 60 minutes at the specific test temperature.


Young's Modulus at -40°C to 100°C

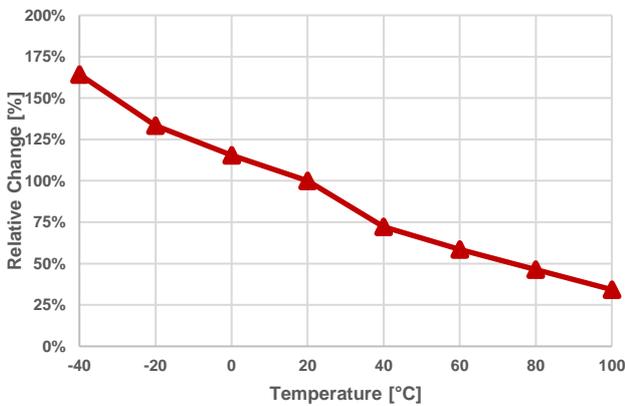

Elongation at Break at -40°C to 100°C

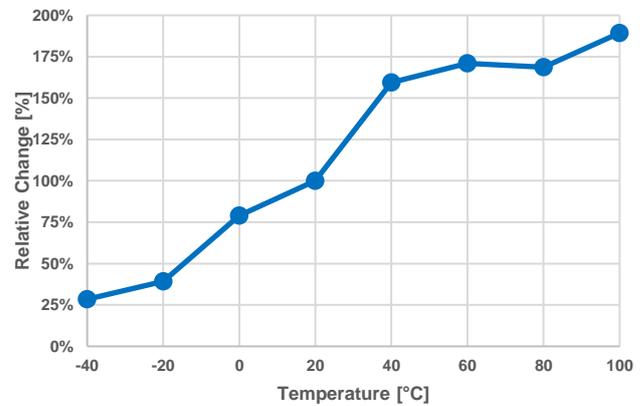

Stress at Break at -40°C to 100°C

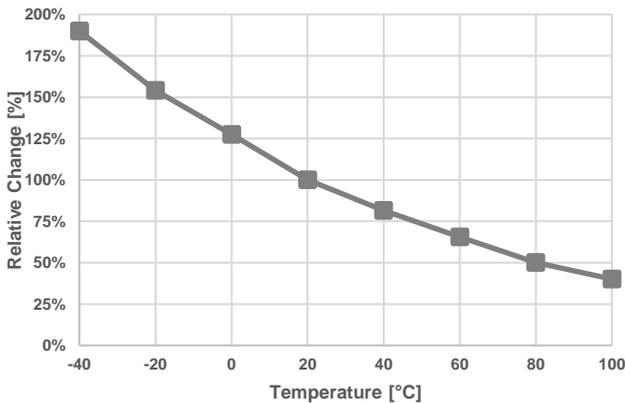

Test parameters:

ASTM D638, Type IV, Pull speed: 5 mm/min, Young's modulus measured at 0.1-1% (regression),


Internal Data Sources:
[FOR176910](#)





IND406™


HDT100 HIGH ELONGATION
PHOTOPLASTIC
BLACK

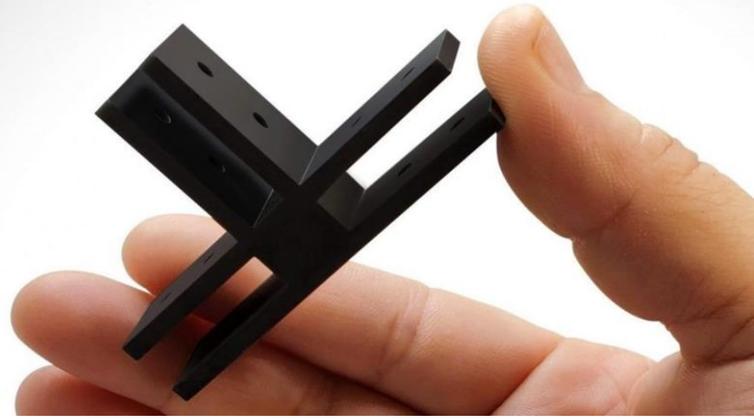


AGEING AND ENVIRONMENTAL EFFECTS – CHEMICAL RESISTANCE (1/2)

LOCTITE 3D IND406 BK has been tested after chemical ageing according to ASTM D543. The influence of chemicals was tested by measuring mechanical properties after different test times (Immersion test for 24 and 168 hours). Exposed samples were stored in containers and fully immersed in different chemicals. Samples were stirred every 24 hours using a shaker. After removal, exposed samples were washed and conditioned for 24 hours at 22°C before mechanical testing. All samples were printed using a validated workflow. Mechanical testing was conducted according to ASTM D638 at standard lab conditions (22°C). "100%" represents non-aged samples stored at 22°C and tested 24 hours after post-processing.


Young's Modulus after Immersion Time

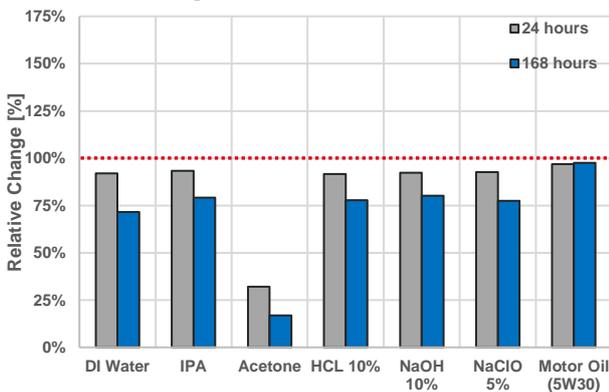

Elongation at Break after Immersion Time

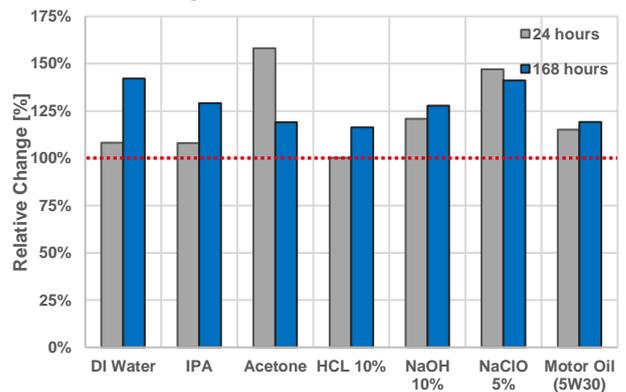

Stress at Break after Immersion Time

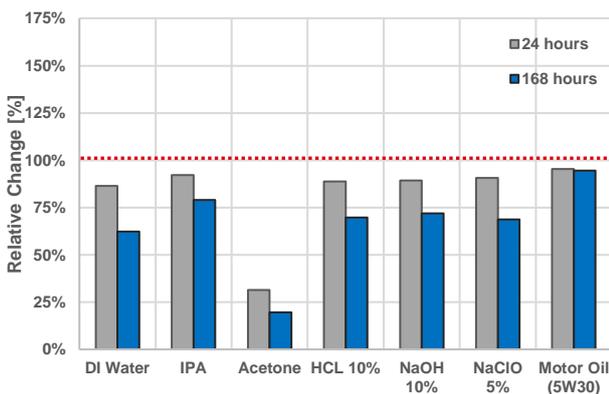

Test parameters:

ASTM D638: Type IV, Pull speed: 5 mm/min, Young's modulus measured at 0.1-1.0% (regression), 22°C

ASTM D543: Samples immersed in different chemicals were stored at 22°C. Samples immersed in Motor Oil were stored at 50°C.

Properties of media used: pH(HCl, 10%) = 1; pH(NaOH, 10%) = 14; pH(NaClO, 5%) = 13

Internal Data Sources:


[DI water] FOR322675, [IPA] FOR322677, [Acetone] FOR322678, [HCl 10 %] FOR322679, [NaOH 10 %] FOR314425, [NaClO 5 %] FOR314429, [5W30] FOR314430.






IND406™

HDT100 HIGH ELONGATION
PHOTOPLASTIC
BLACK

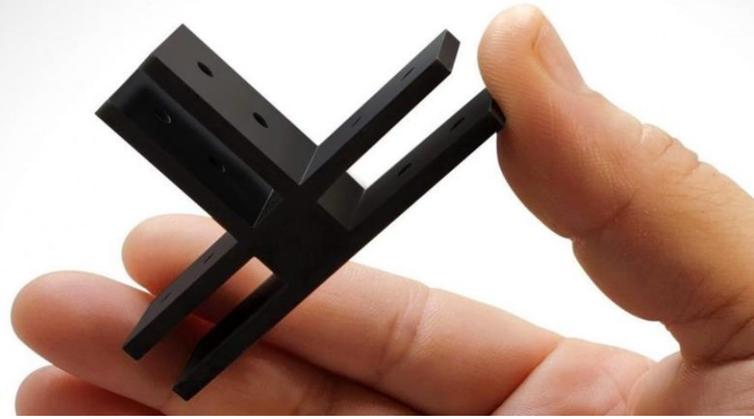

AGEING AND ENVIRONMENTAL EFFECTS – CHEMICAL RESISTANCE (2/2)

LOCTITE 3D IND406 BK has been tested after chemical ageing according to ASTM D543. The influence of chemicals was tested by measuring the mass change after different test times (Immersion test for 24 and 168 hours). Exposed samples were stored in containers and fully immersed in different chemicals. Samples were stirred every 24 hours using a shaker. After removal exposed samples were washed, dried and immediately weighed. All samples were printed using a validated workflow. "100%" represents the initial weight 24 hours after post-processing.

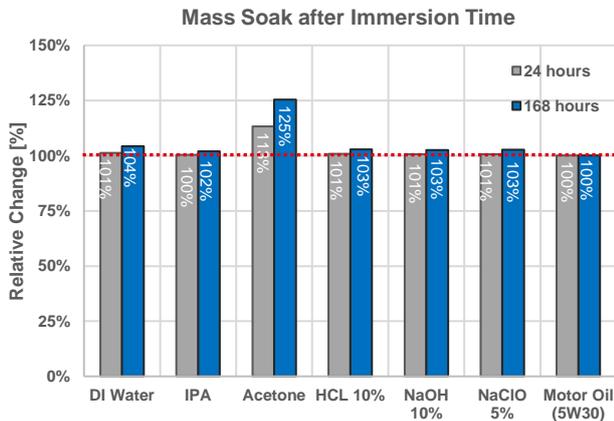

Test parameters:

ASTM D543: Samples immersed in different chemicals were stored at 22°C. Samples immersed in Motor Oil were stored at 50°C.
Properties of media used: pH(HCl, 10%) = 1; pH(NaOH, 10%) = 14; pH(NaClO, 5%) = 13

Internal Data Sources:


[DI water] [FOR322682](#), [IPA] [FOR322687](#), [Acetone] [FOR322694](#), [HCl 10 %] [FOR322695](#), [NaOH 10%] [FOR314434](#), [NaClO 5 %] [FOR314437](#), [5W30] [FOR314439](#).



LOCTITE®

IND406™

HDT100 HIGH ELONGATION
PHOTOPLASTIC
BLACK

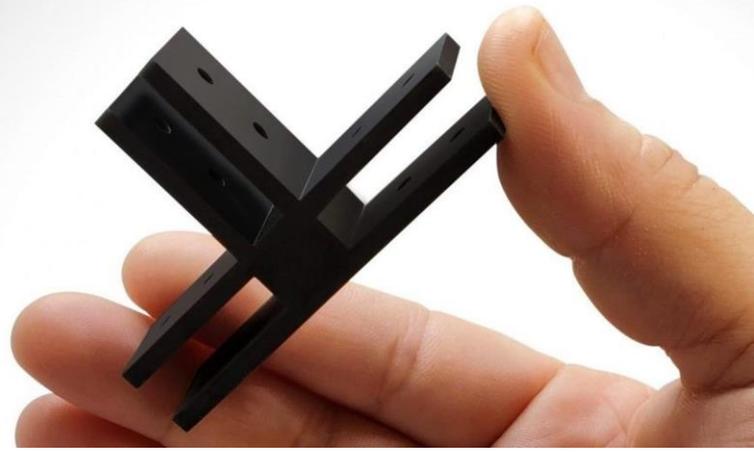

Revision History

Overview of Updates and Revisions


Date / Version	Item	Type (add / update / remove)	Comment	Editor
2023_04_26	Chemical aging	add	-	AL
2023_05_05	PV1200 + format corrections	add /update	-	TM



LOCTITE®

IND406™

HDT100 HIGH ELONGATION
PHOTOPLASTIC
BLACK

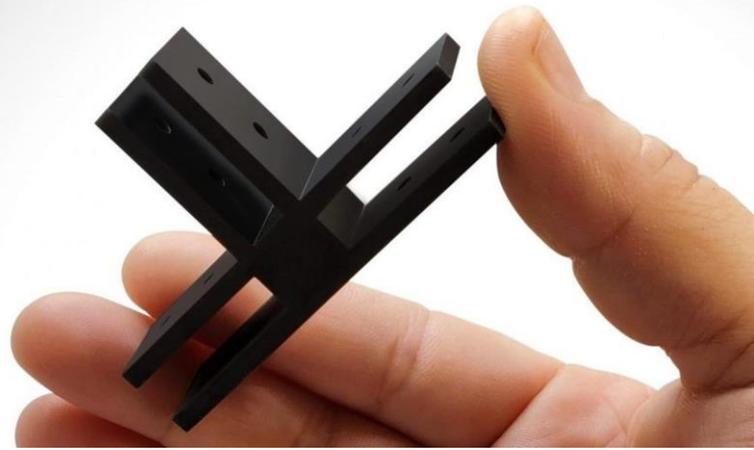

NOTE

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. The product can have a variety of different applications as well as differing application and working conditions in your environment that are beyond our control. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product.

Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

In case products are delivered by Henkel Belgium NV, Henkel Electronic Materials NV, Henkel Nederland BV, Henkel Technologies France SAS and Henkel France SA please additionally note the following:

In case Henkel would be nevertheless held liable, on whatever legal ground, Henkel's liability will in no event exceed the amount of the concerned delivery.

In case products are delivered by Henkel Colombiana, S.A.S. the following disclaimer is applicable:

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. Henkel is not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product.

Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

In case products are delivered by Henkel Corporation, Resin Technology Group, Inc., or Henkel Canada, Inc. the following disclaimer is applicable:

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, Henkel Corporation specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of **Henkel Corporation's products. Henkel Corporation specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits.** The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any Henkel Corporation patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product may be covered by one or more United States or foreign patents or patent applications.

Trademark Usage

Except as otherwise noted, all trademarks in this document are trademarks of Henkel Corporation in the U.S. and elsewhere. ® denotes a trademark registered in the U.S. Patent and Trademark Office.



LOCTITE®



FIND OUT MORE AT
LOCTITEAM.COM

LOCTITE®
Henkel Corporation
loctite3dp@henkel.com




Version 2023/05/05

LOCTITE®

IND406™

HDT100 HIGH ELONGATION
PHOTOPLASTIC
BLACK

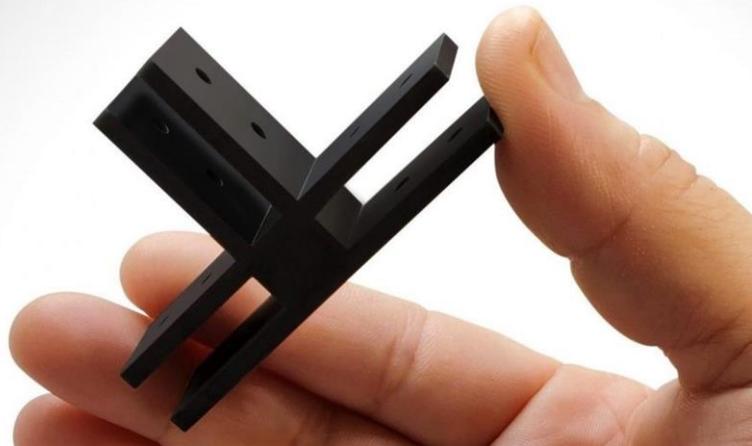

Revision History

Overview of Updates and Revisions

Date / Version	Item	Type (add / update / remove)	Comment	Editor
2023_05_05	Formatting	update	-	DR
2023_05_05	Chemical aging, pH value	Added	-	AL
2023_05_05	PV1200	Added	-	TM

